


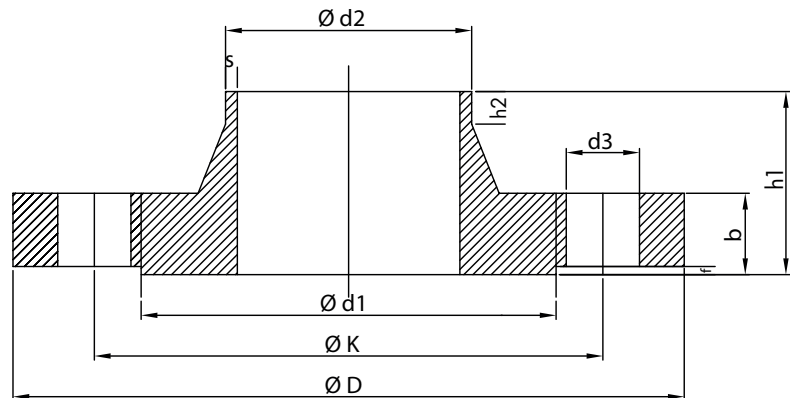

## Flansch EN 1092-1 Typ 11 B1 PN 25

| DN   | d2    | D    | b  | K    | h1  | S    | h2 | d1   | f | Anzahl Gewinde | d3  | Gewicht |
|------|-------|------|----|------|-----|------|----|------|---|----------------|-----|---------|
| 10   | 17,2  |      |    |      |     |      |    |      |   |                |     |         |
| 15   | 21,3  |      |    |      |     |      |    |      |   |                |     |         |
| 20   | 26,9  |      |    |      |     |      |    |      |   |                |     |         |
| 25   | 33,7  |      |    |      |     |      |    |      |   |                |     |         |
| 32   | 42,4  |      |    |      |     |      |    |      |   |                |     |         |
| 40   | 48,3  |      |    |      |     |      |    |      |   |                |     |         |
| 50   | 60,3  |      |    |      |     |      |    |      |   |                |     |         |
| 65   | 76,1  |      |    |      |     |      |    |      |   |                |     |         |
| 80   | 88,9  |      |    |      |     |      |    |      |   |                |     |         |
| 100  | 114,3 |      |    |      |     |      |    |      |   |                |     |         |
| 125  | 139,7 |      |    |      |     |      |    |      |   |                |     |         |
| 150  | 168,3 |      |    |      |     |      |    |      |   |                |     |         |
| 200  | 219,1 | 360  | 30 | 310  | 80  | 6,3  | 16 | 278  | 2 | 12             | M24 | 17,0    |
| 250  | 273   | 425  | 32 | 370  | 88  | 7,1  | 18 | 335  | 2 | 12             | M27 | 24,0    |
| 300  | 323,9 | 485  | 34 | 430  | 92  | 8,0  | 18 | 395  | 2 | 16             | M27 | 31,5    |
| 350  | 355,6 | 555  | 38 | 490  | 100 | 8,0  | 20 | 450  | 2 | 16             | M30 | 48,0    |
| 400  | 406,4 | 620  | 40 | 550  | 110 | 8,8  | 20 | 505  | 2 | 16             | M33 | 63,0    |
| 450  | 457   | 670  | 46 | 600  | 110 | 8,8  | 20 | 555  | 2 | 20             | M33 | 75,5    |
| 500  | 508   | 730  | 48 | 660  | 125 | 10,0 | 20 | 615  | 2 | 20             | M33 | 96,5    |
| 600  | 610   | 845  | 58 | 770  | 125 | 11,0 | 20 | 720  | 2 | 20             | M36 | 138,6   |
| 700  | 711   | 960  | 46 | 875  | 129 | 12,5 | 20 | 820  | 2 | 24             | M39 | 143,5   |
| 800  | 813   | 1085 | 50 | 990  | 138 | 14,2 | 22 | 930  | 2 | 24             | M45 | 193,5   |
| 900  | 914   | 1185 | 54 | 1090 | 148 | 16,0 | 24 | 1030 | 2 | 28             | M45 | 237,0   |
| 1000 | 1016  | 1320 | 58 | 1210 | 160 | 17,5 | 24 | 1140 | 2 | 28             | M52 | 310,5   |

Siehe Maße PN 40